



[→ Product Website](#)

The EV2460 immediately stands out thanks to its extremely narrow bezel. The compact and attractive design provides more desk space. In terms of picture quality and ergonomics, the 23.8-inch monitor in 16:9 aspect ratio also meets the highest demands for a modern screen. An anti-reflection coating and Auto EcoView ensure a glare-free view of the screen. The LCD panel featuring IPS technology enables the greatest possible viewing angles, making it a pleasure to work with the EV2460. The monitor is virtually frameless and is especially impressive when used for multimonitor viewing. It offers a wide range of connection options thanks to DisplayPort, HDMI, DVI-D and D-sub input as well as four USB downstream ports.


- ✓ 23.8-inch LCD monitor in 16:9 aspect ratio featuring IPS technology for excellent image quality
- ✓ Bezel only 1 mm: amazingly compact and ultra-elegant design
- ✓ Flicker-free image reproduction thanks to hybrid brightness control
- ✓ Auto EcoView and EcoView Optimizer for maximum energy-efficiency and superb ergonomics
- ✓ Optimised antireflection properties and flexible positioning
- ✓ USB 3.1 hub with one upstream and four downstream ports
- ✓ DisplayPort, HDMI, DVI-D and D-sub signal inputs
- ✓ Proven to be environmentally friendly and produced in a socially responsible way

Design

A pleasing sight on any desk

Elegant design

The monitor's appearance can be the key to creating a pleasant working atmosphere. Whether you are at home or in the office, the monitor's virtually frameless design and ergonomic functionality allows it to fit naturally into your workplace environment. The housing is available in both an elegant black and in white, with matching white cables.

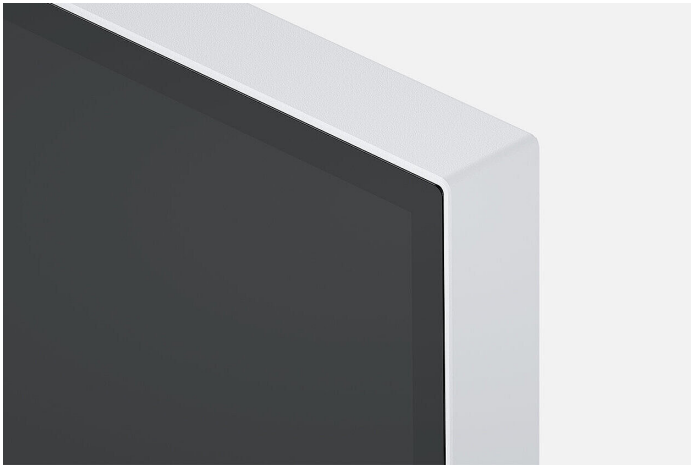

Controls integrated into bezel

Electrostatic switches are integrated into the front of the EV2460 instead of mechanical buttons. This ensures ease of use while also giving the monitor an extremely elegant look. The speakers and all the controls are also built into the bezel, pointing forward in the direction of the user. They are fully integrated into the monitor's flat, nearly frameless design to offer an excellent user experience.


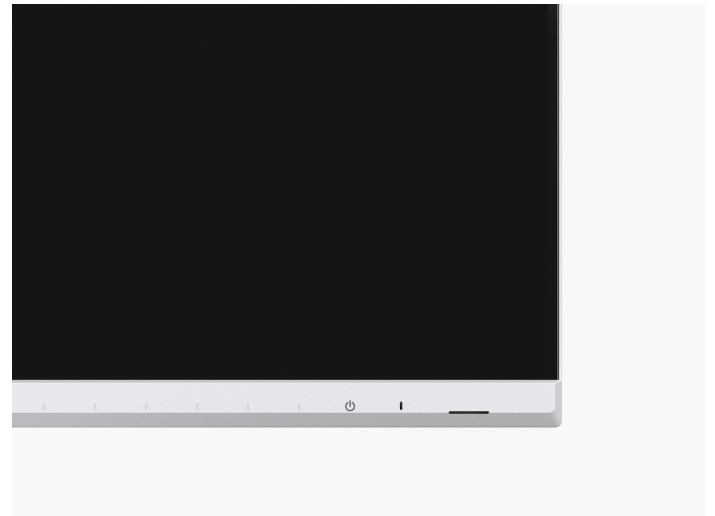


Image quality

Precise, high-contrast, bright and crisp screen


Maximum image quality thanks to the IPS panel

The monitor is capable of all three key elements of excellent image quality: excellent resolution of 1920 x 1080 (Full HD) pixels, maximum contrast of 1000:1, and stable brightness of up to 250 cd/m². That means you will experience razor-sharp text contours, brilliant graphics, and clear images. Thanks to the high-quality IPS panels with LED backlight, contrasts and colours remain stable from every viewing angle.

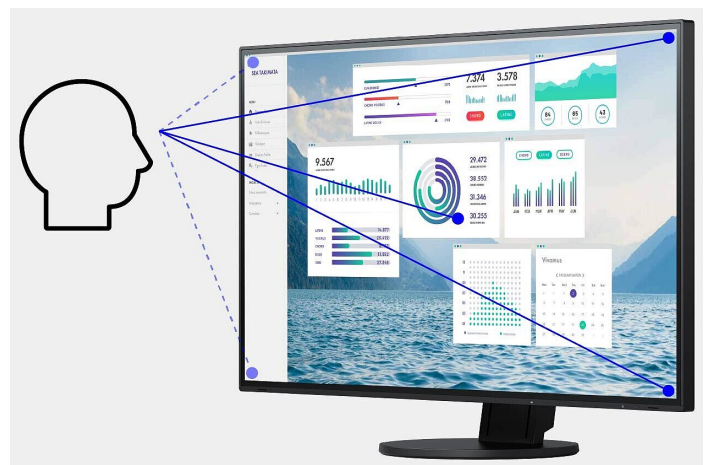


Precise color control

An image can only be perfect if the colours are, too. This is why EIZO monitors have a 10-bit look-up table at a minimum, which allows the colour information to be assigned much more precisely than with conventional 8-bit LUTs. The finest colour gradations ensure that gradients are always perfectly displayed, while also offering customised adjustment options. For example, you can adjust the white balance from 4000 K to 10 000 K in 500-K intervals.



Look-Up-Table with 10 and more bit



Look-Up-Table with 8 bit

Overdrive to quickly change images

Fast, faster, overdrive. The overdrive function accelerates switching time so that the gray-gray change takes only 5 ms on average. You can watch films and rapidly changing images without annoying afterglow.

Ergonomics

Working in a relaxed manner

Save electricity and your eyes with Auto EcoView

At day, at night, bright, dark: No matter when and how you work, the Auto EcoView function continuously measures changes of the ambient light and optimises the monitor with ideal brightness values automatically by using a sensor. The benefits: Annoying glare is reduced, your eyes will not get tired as quickly. A special two-point control takes into account the brightest and darkest environment over the course of the day with the respectively desired screen brightness. Another advantage: Thanks to the automatic brightness adjustment, you will save up to 50% of your electricity costs in comparison to a monitor that is permanently operated at maximum brightness.

Of course, you can also continue to configure the monitor manually. EcoView Index is used for orientation on how environmentally friendly and economical your settings are.



During the day



In the evening

FOR THE SAKE OF THE EYES


Flicker free

To help protect your eyes, EIZO has developed a hybrid technology to control the backlight. This combines the benefits of the otherwise standard PWM (pulse width modulation) and DC (direct current) control. The PWM control uses much higher frequencies than standard PWM methods. The result: a flicker-free viewing experience while maintaining picture quality and colour stability. In addition, compared to pure DC control, you can adjust the brightness to less than 1% of the maximum value in darkly lit rooms. The benefit: Your screen remains free from glare even under these conditions.

The flicker-free and low blue light content of the EIZO FlexScan monitors is certified by TÜV Rheinland.


Anti-glare coating: more image, less reflection

The EV2460 offers a perfect, non-glare surface. By minimising glare by diffusing the reflected light, the EV2460 effectively protects your eyes from straining. This keeps your eyes from getting as tired and allows you to sit comfortably in front of the monitor, without having to sit in a forced position to prevent glare.

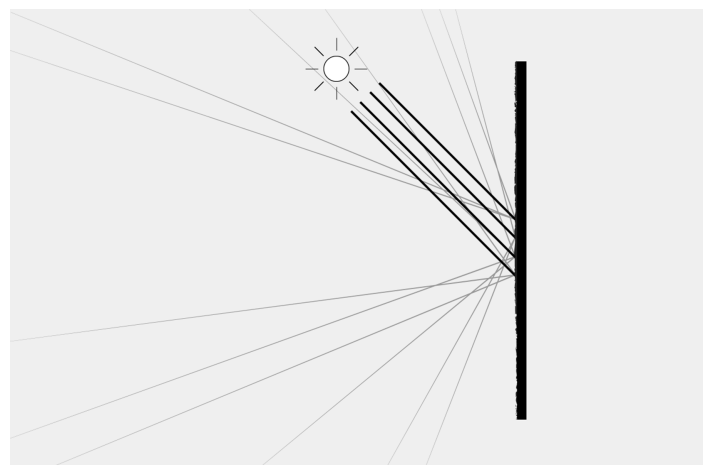


Flexible stand


Ergonomic and stable: the adjustable stand focuses on ergonomics. You can rotate, swivel and tilt the monitor stand until you find the most comfortable setting for your back, neck and sitting posture. It features continuous height adjustment and can be lowered almost to the base plate of the stand, enabling you to position the top image line ergonomically right below your eye level.




Height
140 mm



Tilt
Between 5° forwards and 35° backwards



Swivel
344°



Rotation
90° (clockwise and anti-clockwise)

Variety of ports Best connectivity

One monitor, many ports


It couldn't be easier: Most end devices, such as PC, laptop, mouse, keyboard or headphones, can be connected directly to the monitor, thanks to its wide range of signal interfaces and ports. This makes your daily work easier and ensures a tidy desk.



Software and ease of use Features for greater comfort


Preset color modes: optimized display at the touch of a button

Pre-set color modes optimise the viewing of images, texts or films. Because it makes a difference whether you are watching a film, editing a picture, surfing the net, or writing texts. At the touch of a button, you set the respective pre-set for brightness, gamma correction and colour temperature. For example, the Paper mode simulates the pleasant contrast of printed paper, which is easy on the eyes when reading and prevents fatigue.

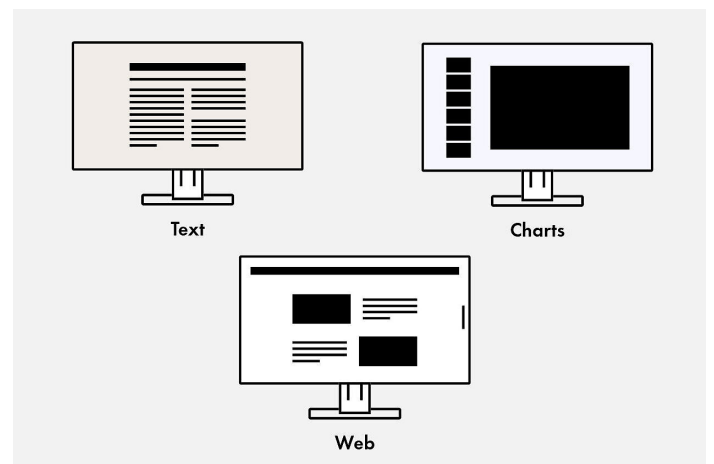

Operation made easy thanks to the Button Guide

With the Button Guide, you have all functions at a glance. One touch of the control panel is enough, and the function assignment of the buttons is displayed. Your advantage: clarity of operation and a clean, uncluttered design.

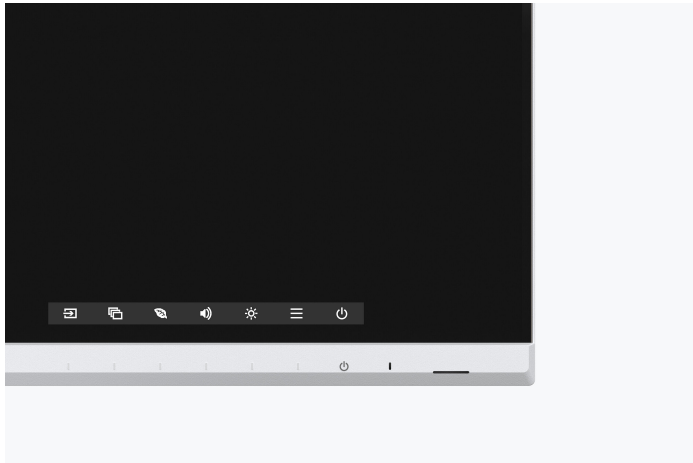

MONITORSTEUERUNG UND ADMINISTRATION

Screen InStyle


In addition to the on-screen menu, you can conveniently control the EV2460 by using the Screen InStyle software on a Windows PC. The configuration options include color reproduction, energy saving options, and ergonomic functions. In multi-screen systems, the settings can be applied synchronously to all connected screens with Screen InStyle.

System administrators can centrally manage and control monitors connected in the network with Screen InStyle installed using the Screen InStyle Server application. This optimises power consumption and simplifies asset management of the monitors.

COMPANY-WIDE DEFAULT SETUP

Monitor Configurator

Workload reduction for administrators: The software allows you to create a default setup for all relevant monitor settings. This setup can be distributed to the connected monitors via the local network which facilitates the roll-out process.

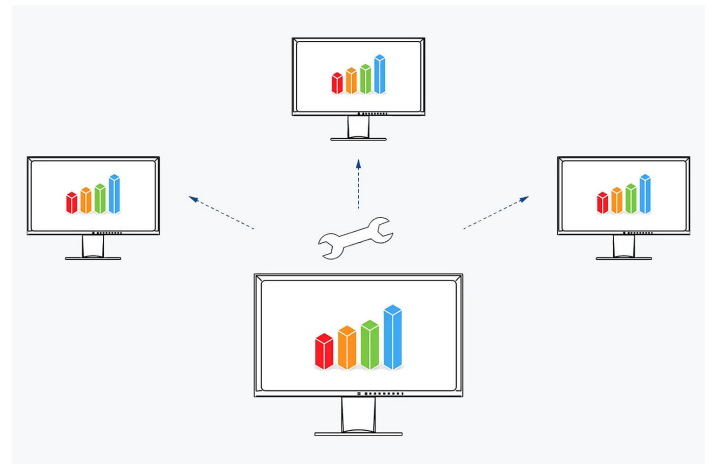

Sustainability

Environmentally and socially conscious production

ECOVIEW OPTIMIZER

Save up to 30% of energy

Save electricity without compromising quality: The EcoView Optimizer reduces the background lighting fully automatically for dark images. This reduces electricity consumption by up to 30%. At the same time, the signal is amplified and the color tone values adjusted. The result: You will enjoy the image quality you are used to but consume less power.



Zero-watt consumption thanks to the power switch

The monitors have an integrated mechanical power switch, which is extremely practical and energy-saving: If you switch off the monitor using the power switch, the device will stop consuming any power at all. Moreover, it consumes a maximum of 0.5 watt in standby mode.

Socially responsible production

The EV2460 is produced in a socially responsible way. It is free of child labour and forced labour. Suppliers along the supply chain have been carefully selected and they have also committed themselves to produce in a socially responsible way. This applies in particular to conflict minerals. We present a detailed report about our social responsibility annually and voluntarily.




Environmentally and climate friendly

Each EV2460 is manufactured in our own factory, which implements an environmental management system in accordance with ISO 14001. This includes measures to reduce waste, wastewater and emissions, resource and energy consumption, as well as to encourage environmentally conscious behaviour among employees. We publicly report on these measures on an annual basis.



Sustainable and durable

The EV2460 is designed for a long service life that takes into account the entire lifecycle and impact on the environment. It is generally well above the five-year guarantee. Spare parts are available up to five years after the end of production. The monitor's long service life and the ability to repair it save resources and the climate. When designing the EV2460 we paid attention to reducing resource consumption by using high-quality components and materials and being meticulous in production.

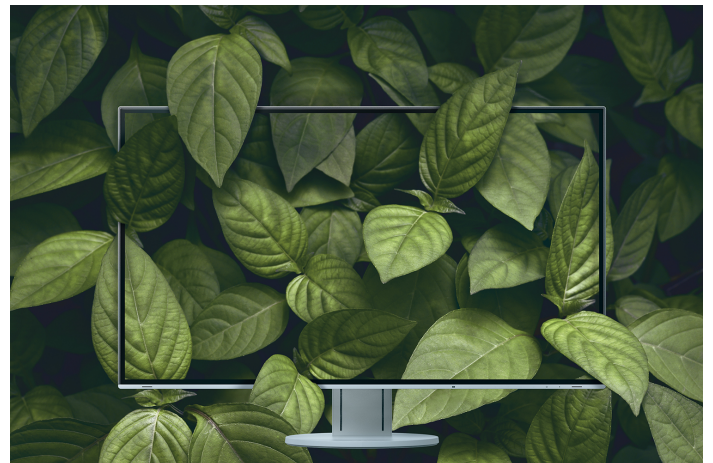

A natural beauty

Reducing the use of volatile organic compounds (VOCs) found in material production, such as some paints, is a global concern.

Through years of research, EIZO has succeeded in achieving a smooth, nearly homogeneous color and texture in its monitor housings without the use of varnish.



Compliance with standards and guidelines

The monitor is certified according to important and all-encompassing sustainability standards such as TCO Certified Generation 9, EPEAT and ENERGY STAR®. The EV2460 is a safe investment, when taking into account issues such as ESG (Environmental, social and corporate governance) or SDG (Sustainable Development Goals) from the United Nations and following the necessary guidelines.



Warranty

Highest investment security

Five-year warranty

EIZO grants a five-year warranty. This is possible thanks to the highly developed production process based on a simple principle of success: sophisticated and innovative technology, made from high-end materials.



Technical data

GENERAL

Item no.	EV2460-BK EV2460-WT
Case colour	Black White
Solution area	Office
Product line	FlexScan
Areas of application	Large and medium-sized companies, Private user & small business, CAD, Finance, Control rooms, Hospital administration
EAN	4995047055297 4995047055303

DISPLAY

Screen size [in inches]	23,8
Screen size [in cm]	60,5
Format	16:9
Viewable image size (width x height)	527 x 296,5
Ideal and recommended resolution	1920 x 1080 (Full HD)
Pixel pitch [mm]	0,2745 x 0,2745
Pixel density [in ppi]	93
Resolution supported	1920 x 1080 (Full HD), 1680 x 1050, 1280 x 1024, 1024 x 768, 800 x 600, 720 x 400, 640 x 480
Panel technology	IPS
Max. viewing angle horizontal	178
Max. viewing angle vertical	178
Number of colours or greyscale	16.7 million colors (D-Sub, 8 Bit), 16.7 million colors (DVI, 8 Bit), 16.7 million colors (DisplayPort, 8 Bit), 16.7 million colors (HDMI, 8 Bit)
Colour palette/look-up table	1.06 billion color tones / 10 Bit
Max. colour space (typical)	sRGB (100%)
Max. brightness (typical) [in cd/m ²]	250
Max. dark room contrast (typical)	1000:1
Response time grey-grey alternation (typical) [in ms]	5
Max. refresh rate [in hertz]	60
Backlight	LED

CONNECTIONS

Video Input	D-Sub, DisplayPort (HDCP 1.3), HDMI (HDCP 1.4), DVI-D (HDCP 1.4)
USB specification	USB 5Gbps (USB 3)
USB upstream ports	1 x type B
USB downstream ports	4x type A
Video signal	RGB Analog, DisplayPort, HDMI (RGB, YUV), DVI Dual Link (TMDS)
Synchronization format	Separate
Audio input	3.5 mm stereo jack, DisplayPort, HDMI
Audio output	3.5 mm stereo jack

FEATURES & OPERATION

Preset colour/greyscale modes	2x manual memory locations, sRGB, Paper, Movie, DICOM
DICOM tone curve	✓
Auto EcoView	✓
EcoView Index	✓
EcoView Optimizer	✓
Overdrive	✓
No flickering thanks to hybrid controls	✓
Signal range extension (HDMI)	✓
HDCP Decoder	✓
Input signal identification	✓
Built-in speakers	✓
OSD language	de, en, fr, es, it, se
OSD setting options	Color Mode, Brightness, Contrast, Color temperature /White point, Gamma, Overdrive, Colour tone, Color saturation, Resolution, Scaling, OSD language, Signal input, All EcoView functions, Volume
Button Guide	✓
Integrated power unit	✓

ELECTRICAL DATA

Frequency	Display Port: 31-68 kHz/59-61 Hz; HDMI: 49-51 Hz/59-61 Hz; DVI-D: 31-68 kHz/59-61 Hz; D-Sub: 31-68 kHz/59-61 Hz;
Power consumption (typical) [in watt]	10
Maximum Power Consumption [in watt]	50 (at maximum brightness with all signal inputs and USB ports in use)
Power Save Mode [in watt]	0.5
Power consumption off [in watt]	0
Energy efficiency class	B
Energy consumption/1000h [in kWh]	9
Power supply	AC 100-120 V / 200-240 V, 50/60 Hz
Power management	✓

DIMENSIONS & WEIGHT

Dimensions [mm]	538 x 333,6-473,6 x 233
Weight [in kilograms]	5.9
Dimensions without stand [mm]	538 x 320 x 54
Weight without stand [in kilograms]	3.8
Link technical drawing	Dimension drawing (PDF)
Swivel	344
dimensionTilt	5 / 35
Housing dimension details	90° (clockwise and anti-clockwise)
Height adjustment range [mm]	140
Hole spacing	100 x 100

CERTIFICATION AND STANDARDS

Certification	CE, CB, TÜV/GS, TÜV/Ergonomics (including ISO 9241-307), TCO Certified Generation 9, EPEAT 2018 (US), TÜV/Blue Low Light Content, TÜV/Flicker Free, RCM, cTÜVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, EPA ENERGY STAR, RoHS, WEEE, China RoHS, CCC, EAC
----------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

SOFTWARE & ACCESSORIES

Software	Screen InStyle
Additional supply	USB cable (Type A - Type B), Signal cable DisplayPort - DisplayPort, Manual via download, Power cord, Quick guide
Accessories	PM200-K, CP200, HH200PR-K, PCSK-03R

WARRANTY

Warranty duration	5 years for unit and LCD module up to 30,000 operating hours, whichever comes first.
Included warranty service	Zero pixel defects guarantee; no fully illuminated sub-pixels (sub-pixels ISO 9241-307) for six months from date of purchase.
